


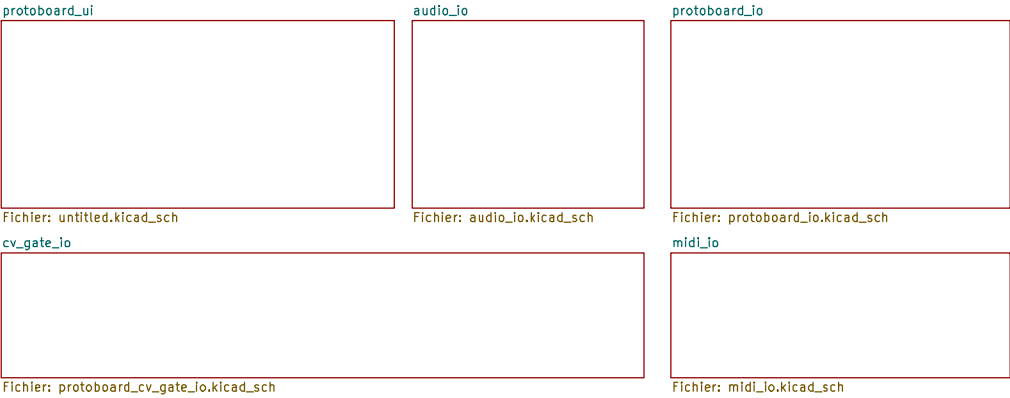

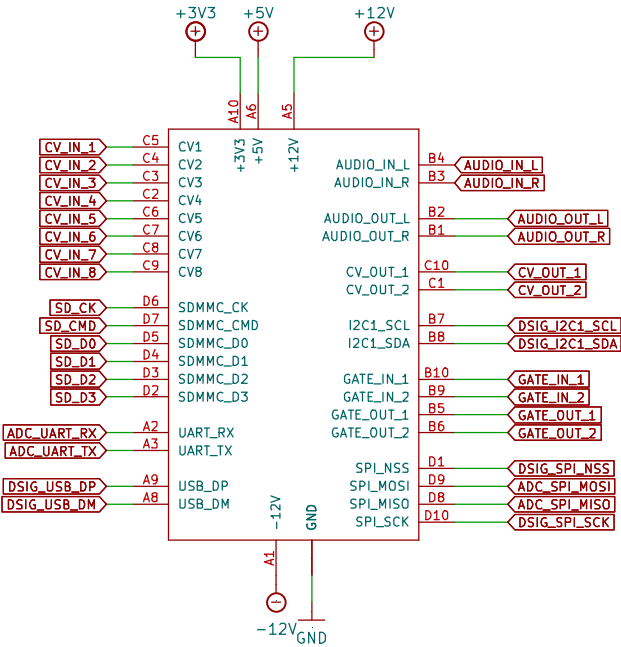
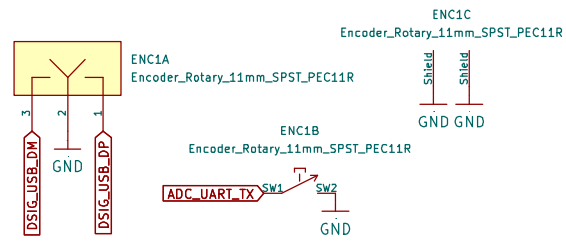

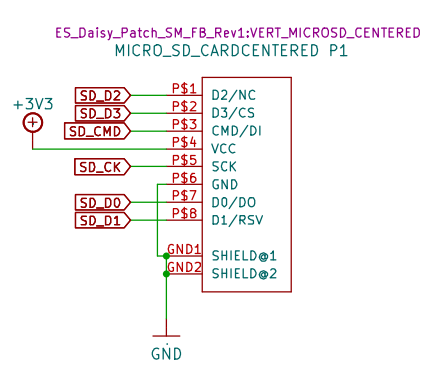
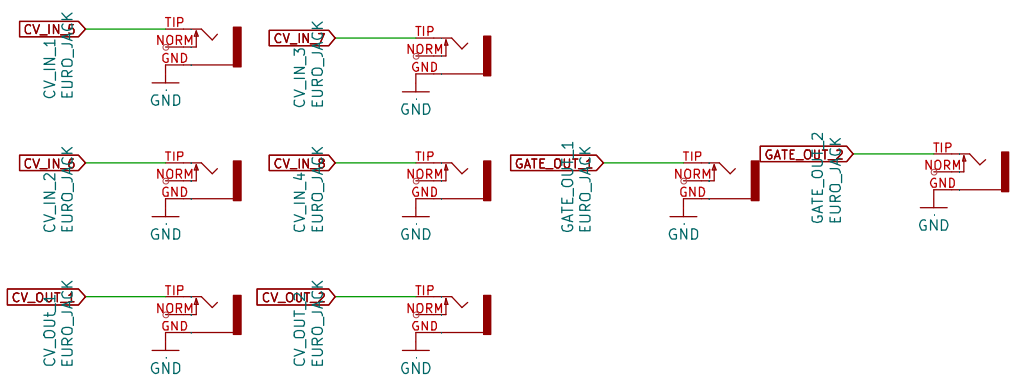



The generic comm. protocols are connected directly to the processor.
This means they can be used for standard functions including switches, LEDs, etc.



The CV in pins are -5V to 5V inputs
The CV out pins are 0-5V output
The Gate in pins are connected to BJT circuits
The Gate out pins are identical to the CV out circuit






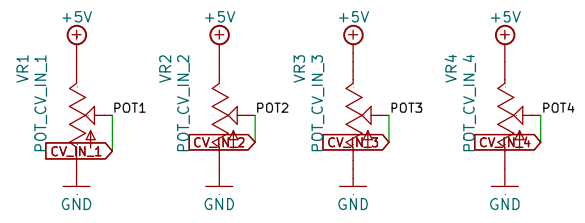

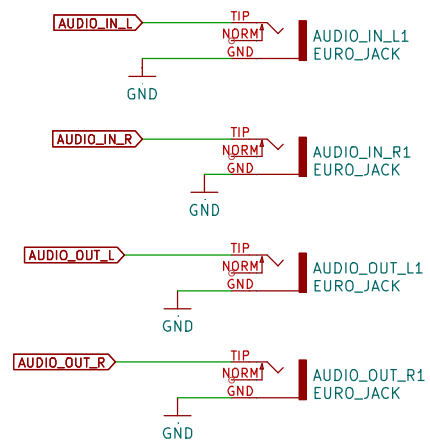

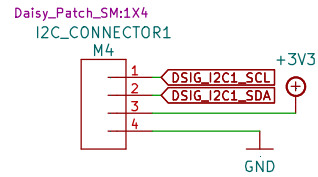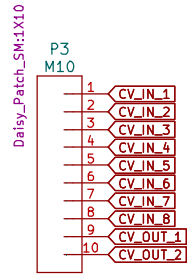

Connector_JST:JST_PH_S4B-PH-K-1x04-P2.00mm_Horizontal

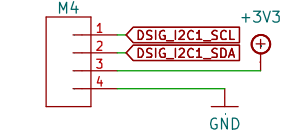

Connector_JST:JST_SH_SM04B-SRSS-TB-1x04-1MP-P1.00mm_Horizontal

